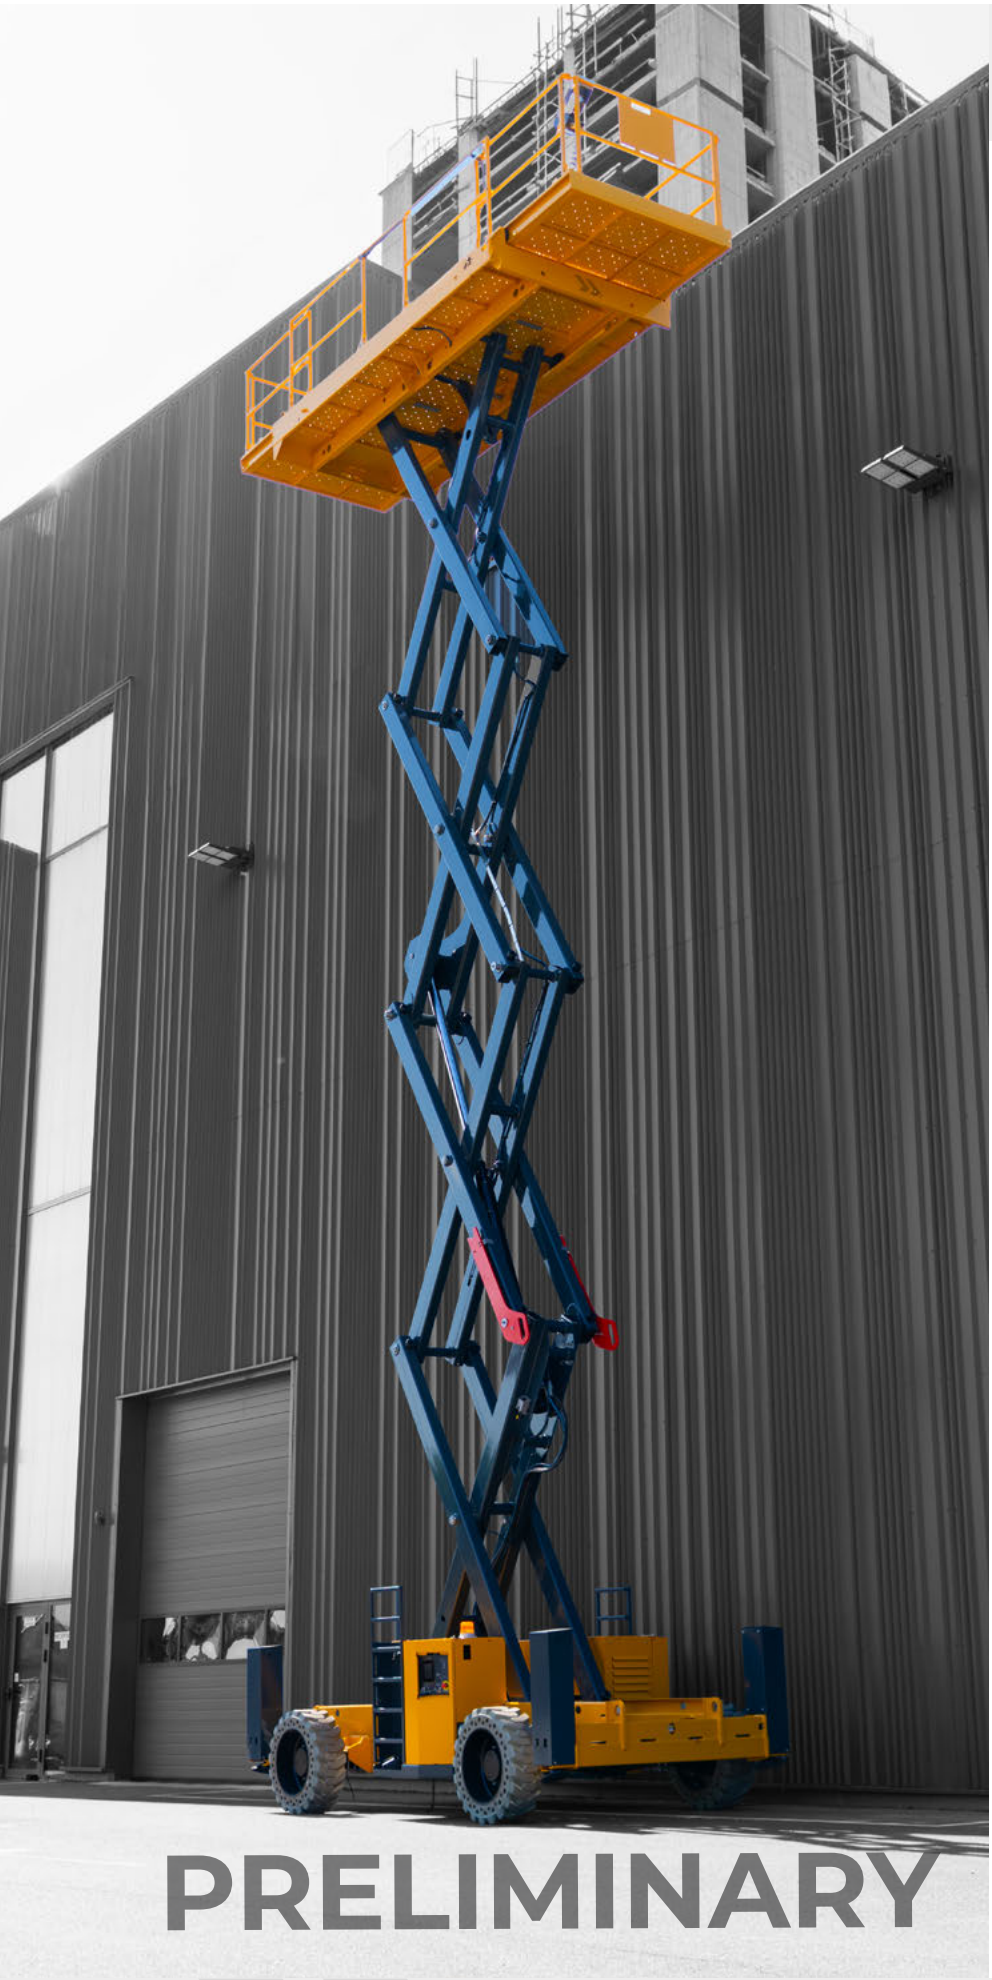


HS15 RT / HS18 RT

BUILT FOR EFFICIENT OPERATION

- Activ'Screen: onboard interface for configuration and advanced diagnostics
- <19-kW engine without DPF: less maintenance
- Stop Emission System: up to 5% fuel savings and up to a 20% reduction in engine and peripheral component operating time
- Upper control box with integrated display: real-time information and operator assistance

UNCOMPROMISING PRODUCTIVITY

- L or XL platform with two extensions for an optimized workspace
- Quick-folding guardrails secured with just 8 pins
- Automatic or manual adjustment of the outriggers
- Activ'Shield Guard and Activ'Lighting System (option)

PERFORMANCE FOR ALL TERRAINS

- 4-wheel drive
- Differential wheel lock for optimal traction
- Engine stall prevention system


HS15 RT / HS18 RT

PRELIMINARY

ROUGH TERRAIN SCISSOR LIFTS

TECHNICAL DATA

	HS 15 RT	HS 18 RT
Working height	15 m	18 m
Platform height	13 m	16 m
Maximum drive height	15 m	14,5 m
Lift capacity	680 kg (4 pers.)	
Lift capacity on the extension	225 kg	
A Length	4,4 m	
B Width	2,3 m	
C Height - stowed	3,12 m	3,22 m
Wheelbase	2,75 m	
Ground clearance	26 cm	
D Platform length	4 m	
E Platform width	1,89 m	
Extended platform length	5,9 m	
Platform extension length	0,95 m	
Guardrails lowered	2,4 m	2,5 m
XL platform length (option)	4,96 m	
XL platform length - extended (option)	7,51 m	
XL Extension Length (optional)	1,28 m	
XL platform width (option)	2,08 m	
Drive speed	0,8 - 5 km/h	
Turning radius - inside	3,1 m	
Turning radius - outside	6,1 m	
Engine	Kubota, 18.5 kW (Stage 5 in EU)	
Gradeability	40 %	
Tilt (longitudinal / lateral)	5° / 3°	5° / 2°
Cured-on solid tires	830*285 - 530	
Weight	6 660 kg	7 300 kg
Weight - with XL platform	6 800 kg	7 640 kg

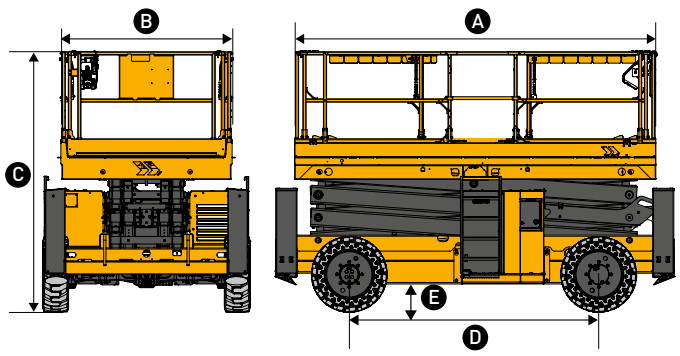


STANDARD EQUIPMENT

> Activ'Screen
> Stop Emission System
> Upper control box with display and real-time information
> 2 entrances with drop bar
> 2 platform extensions
> Folding guardrails
> Platform calibration at 0 kg
> Individual and automatic outriggers adjustment
> 4-wheel drive
> 12V starter battery

OPTIONS AND ACCESSORIES

> Activ'Lighting System
> Activ'Shield Guard: secondary guarding system
> XL platform: wider, longer, with a removable floor
> Swing door
> Cold weather kit
> Air line to platform
> Complete outriggers covers
> Telematics solutions
> Non marking tires

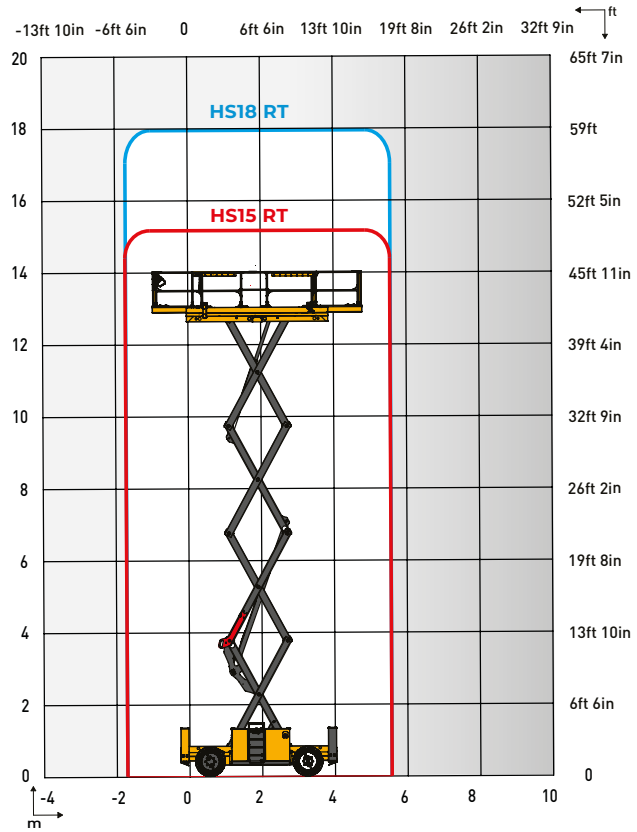

40011026730 · Non contractual document · We reserve the right to modify the technical characteristics of this document without notice · 09/2026

Haulotte · Rue Emile Zola - 42420 Lorette - France · Tel: +33 (0)4 77 29 24 24 · Fax: +33 (0)4 77 29 43 95
haulotte@haulotte.com · **www.haulotte.com**

Haulotte
LET'S DARE TOGETHER